


- NOTES:
1. MATERIAL: PBT
OTHER MATERIALS AVAILABLE
 2. SIGNAL CONTACT PLATING: SOFT NICKEL, THEN SOFT GOLD
 3. PIN SETBACK: 0.06" (1.5 mm)
EN 60601 TOUCHPROOF
 4. GENERAL PERFORMANCE (CONTACT POI FOR TEST CONDITIONS)
EXTRACTION FORCE: 1.9 LBS MINIMUM (8.5 N)
LIFE CYCLE: 1000+ INSERTION CYCLES
MAX. CURRENT: 8 AMPS
 5. OPERATING TEMPERATURE: +5° C to + 60° C
 6. UL94 V-0/5V
 7. WAVE SOLDERABLE
 8. MATES WITH 441 (881), 503, 455, 592
 9. DIN 42-802 TYPE BU
 10. MAX FLASH .003"

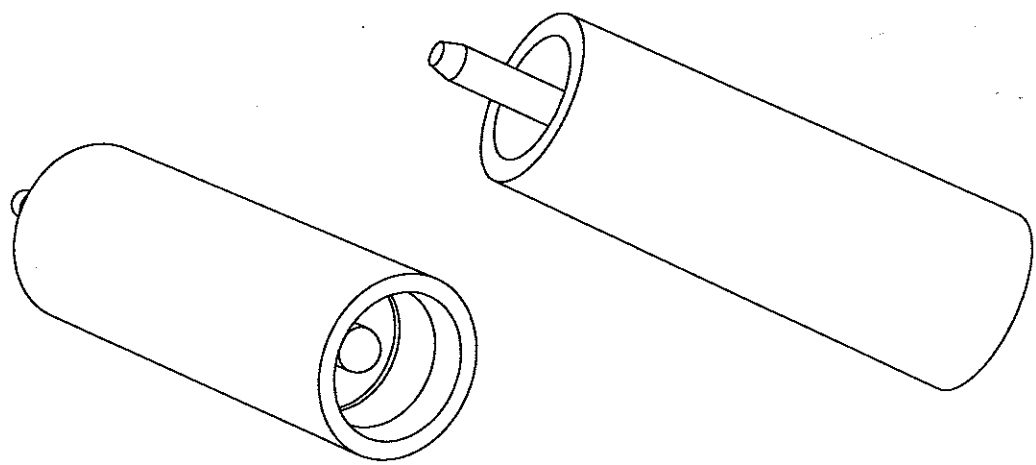

E	REV PER ECO 31956 XZ 8/31/18	9/26/18	SW
	REDRAWN IN SOLIDWORKS TAS 7/22/13		
D	REV PER ECO 5781 BB 7/20/01	1/2/02	BB
C	REV PER ECO 5036 BB 6/13/00	6/20/01	BB
B	REV PER ECO 1266 SJ 7/7/95	12/12/95	WON
A	RELEASE PER ECO 844 BB 9/9/94	9/30/94	LJL
REV	DESCRIPTION	DATE	BY

REVISIONS

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND MAY NOT BE ISSUED OR REPRODUCED, IN WHOLE, OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF PLASTICS ONE INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN INCHES DIMENSIONS IN [] METRIC		APPROVALS	DATE
FRACTIONAL ±1/64		DRAWN B BRINDLE	1/31/94
DECIMAL .00 ±.01 [.25mm] .000 ±.005 [.127mm]		CHECKED <i>T. Slump</i>	9/18/18
ANGULAR ±5°		PROJ ENGR	
		APPROVED <i>R. Gandy</i>	9/18/19
		PROJECT 7189	FSCM

PlasticsOne
 Medical, Research & Audio Components
 6591 MERRIMAN ROAD, S.W., ROANOKE, VA, 24018
 PHONE: 540-772-7950 FAX: 540-989-7519

TITLE: JACK, PCB, 1.5mm TOUCHPROOF

SCALE: 4:1

SIZE	DWG	REV	SHT
A	36659-50	E	OF 1