


30

- NOTES:**
1. MATERIAL: PBT
OTHER MATERIALS AVAILABLE
 2. SIGNAL CONTACT PLATING: SOFT NICKEL, THEN SOFT GOLD
 3. PIN SETBACK: 0.06" (1.5 mm)
EN 60601 TOUCHPROOF
 4. GENERAL PERFORMANCE (CONTACT POI FOR TEST CONDITIONS)
EXTRACTION FORCE: 1.9 LBS MINIMUM (8.5 N)
LIFE CYCLE: 1000+ INSERTION CYCLES
MAX. CURRENT: 8 AMPS
 5. OPERATING TEMPERATURE: +5° C to + 60° C
 6. UL94 V-0/5V
 7. WAVE SOLDERABLE
 8. MATES WITH 441 (881), 503, 455, 592
 9. DIN 42-802 TYPE BU

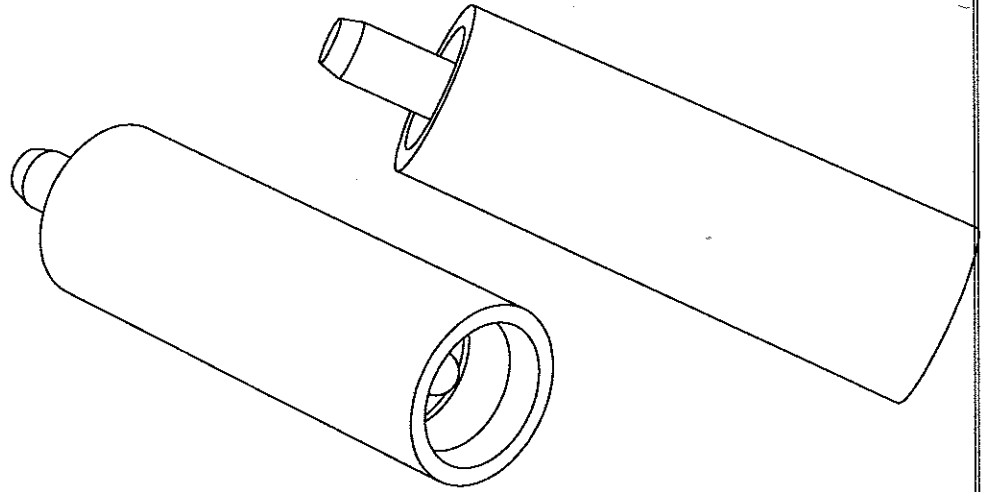

E	REV PER ECO 31956 XZ 9/4/18	9/26/18	SVA
	REDRAWN IN SOLIDWORKS TAS 7/22/13		
D	REV PER ECO 5781 BB 7/20/01	1/2/02	BB
C	REV PER ECO 5036 BB 6/13/00	6/20/00	BB
B	REV PER ECO 1266 SJ 7/7/95	12/12/95	WON
A	RELEASE PER ECO 844 BB 9/9/94	9/30/94	LJL
REV	DESCRIPTION	DATE	BY
REVISIONS			

TOLERANCES
UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS IN INCHES
DIMENSIONS IN [] METRIC

FRACTIONAL
±1/64

DECIMAL
.00 ±.01 [.25mm]
.000 ±.005 [.127mm]

ANGULAR
±5°

APPROVALS	DATE
DRAWN B BRINDLE	1/31/94
CHECKED <i>T. Stump</i>	2/10/18
PROJ ENGR	
APPROVED <i>R. Eppley</i>	9/18/18
PROJECT 7189	FSCM

PlasticsOne
Medical, Research & Audio Components
6591 MERRIMAN ROAD, S.W., ROANOKE, VA, 24018
PHONE: 540-772-7950 FAX: 540-989-7519

TITLE
JACK, PCB, 1.5mm TOUCHPROOF

SCALE 4:1

SIZE A	DWG 36660-50	REV E	SHT OF 1
-----------	-----------------	----------	-------------

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND MAY NOT BE ISSUED OR REPRODUCED, IN WHOLE, OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF PLASTICS ONE INC.